



Manual / User Manual
Svenska / English

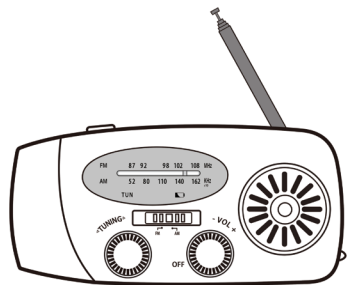

- Vrid på volymkontrollen för att slå på radion och justera volymen.
- Välj AM/FM med BAND-knappen. Dra ut antennen för att få bättre signal.
- Vrid på inställningsknappen för att välja kanal. Grön indikator tänds när en kanal är korrekt vald.

FICKLAMPA: Tryck på ficklampans knapp för att slå på/av.

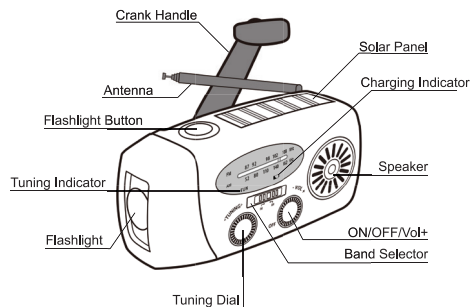

Svenska - 2 -

Innan du slår på din radio, se till att läsa
SÄKERHETSINSTRUKTIONERNA.



A. SOLKRAFT

- Placera solpanelen i direkt solljus.
- Laddningsindikatorn blir röd när batteriet laddas.
- Du kan inte ladda helt med enbart solpaneler, att ladda med solpanelen är mest för att upprätthålla batterikraften.
- Ladda inte radion i ett varmt område så som i en bil. Det är också lämpligt att stänga av radion under laddning.
- OBS: Solpanelen har en livslängd på mer än 25 år när den används i 6 timmar per dag.

- För att ladda radion, sätt in den medföljande USB-kabeln i USB-strömkälla. Plus Micro USB-kontakten i ingångsporten på sidan av radion.
- Laddningsindikatorn blinkar rött när batteriet laddas.
- Det tar cirka 3,5 timmar för den interna 18650 200mAh Li-ON-batteri för att ladda helt. Indikatorn förblir röd.
- När det är helt laddat kommer batteriet att leverera 9-10 timmars radiouppspelning (beroende på ljudvolymen) eller 15-17 timmars ficklampatid.


Svenska - 3 -

- Fäll ut handtaget från baksidan av radion och vrid den i endera riktningen.
- Vrid handveven i 3-5 minuter för att aktivera det inre batteriet för första användning.
- Vrid handveven med en hastighet av 130-150 RPM/min för kraft som ska genereras. Enheten kommer att vara fulladdad på 7 timmar.
- En minuts vevning ger 3-5 minuters radiospelning (vid medelvolyum) och 45-60 minuter ljus.



Svenska - 4 -

- Denna solcellsvevradio kan ladda USB-enheter av Li-ion batteri av radion eller genom att veva med en hastighet av 130-150 RMP/minut.
- Sätt i USB-kabeln i USB-ingången på sidan på radion och anslut till enheten.
- Radion går in i laddningsläge och hjälper till att ladda din enhet.

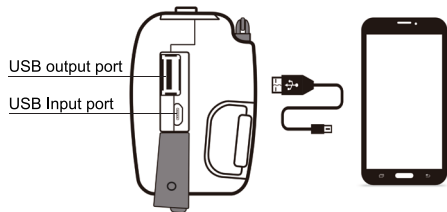

OBS:

- Den här funktionen är endast till för att ladda USB-enheterna under nödsituation. Använd den inte som en vanlig powerbank.
- Den medföljande laddningskabeln är endast för laddning Micro USB/iPhone-enheter (med adapter). Annan USB enheter ska laddas med original laddningskabel.

Svenska - 5 -

Frekvensomfång	AM 520-1620KHz FM 87-108MHz
Dimensioner	130x50x60mm
Vikt	231g
Produkt Material	ABS / PC / PVC
Energiförbrukning	3W (max)
Arbetsspänning	2.7V - 4.2V
Vattentålig nivå	IPX - 3
LED ficklampa	1W / 30LM
Power source	3.7V / 2000mah 18650 Li-ion


- Att tappa den här radion kan orsaka personskador eller skador på radion. Enheten tål inte kraftiga stötar eller kontakt med frätande vätskor.
- Denna radio är inte vattentät, bara vattentålig. Håll enheten torr eftersom fukt och vätskor kan skada radion.
- Veva i 3-5 min före användning för att aktivera och för att hålla det interna batteriet friskt.

- Denna vevradio har hela 12 månaders garanti mot tillverkningsfel.
- Garantiperioden börjar från inköpsdatum.

Svenska - 6 -

- Rotate the volume control knob to turn on the radio and adjust the volume.
- Select AM/FM with BAND button. Extend the antenna to get better signal.
- Rotate the tuning knob to select channel. Green tune indicator will turn on when a channel is properly selected.

FLASHLIGHT: Press the flashlight button to turn it on/off.

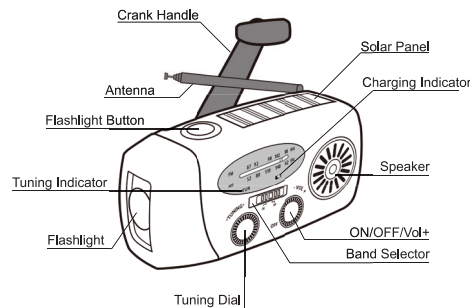

English - 7 -

Before you power your radio, make sure to read the SAFETY INSTRUCTIONS.



A. SOLAR POWER

- Place solar panel in direct sunlight.
- Charging indicator will turn red as the battery charges.
- You can't fully charge with solar panels alone, charging with solar panel is mostly for maintaining the battery power.
- Do not charge the radio in a hot area such as a car. It is also advisable to turn the radio off when charging.
- NOTE: The solar panel has a lifespan of more than 25 years when used for 6 hours per day.

- To charge the radio, insert the supplied USB cable into the USB power source. Plus the Micro USB connector into the input port on the side of the radio.
- The charging indicator will flash red as the battery charges.
- It takes about 3.5 hours for the internal 18650 200mAh Li-ON battery to fully charge. The indicator stays red.
- When completely charged, the battery will deliver 9-10 hours of radio play (depending on the sound volume) or 15-17 hours of flashlight time.


English - 8 -

- Unfold the handle from the backside of the radio and rotate it in either direction.
- Turn the hand crank for 3-5 minutes to activate the internal battery for initial use.
- Wind the hand crank at a speed of 130-150RPM/min for power to be generated. Unit will be fully charged in 7 hours.
- One minute of winding gives 3-5 minutes of radio play (at medium volume) and 45-60 minutes of light.



English - 9 -

- This solar crank radio can charge USB devices by the Li-ion battery of the radio or by cranking at a speed of 130-150RMP/minute.
- Insert the USB cable into the USB output port on the side of the radio and connect to the device.
- The radio will go into charging mode and help to charge your device.

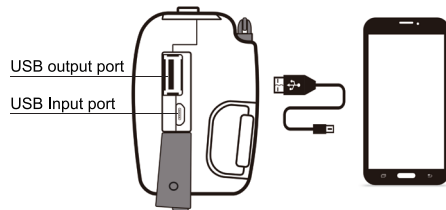

Note:

- This feature is only for charging the USB devices during emergency. Do not use it as a normal powerbank.
- The supplied charging cable is only for charging Micro USB/iPhone devices (with adaptor). Other USB devices should be charged using original charging cable.

English - 10 -

Frequency range	AM 520-1620KHz FM 87-108MHz
Dimensions	130x50x60mm
Weight	231g
Material	ABS / PC / PVC
Power consumption	3W (max)
Working voltage	2.7V - 4.2V
Water-resistant level	IPX - 3
LED flashlight	1W / 30LM
Power source	3.7V / 2000mah 18650 Li-ion

- Dropping this radio can cause injury or damage. The unit will not resist strong impact or contact with corrosive liquids.
- This radio is not waterproof, just water-resistant. Keep the unit dry as moisture and liquids can damage it.
- Wind the crank for 3-5 min before use to activate and keep the internal battery health.

- This crank radio has a full 12-month warranty against manufacturing defects.
- The warranty period begins from the date of purchase.

English - 11 -

C Two Products AB
Ridbanegatan 4
SE-213 77 Malmö
ctwo.se

Made in China
Article no: 16555
October 2022

